


TABLE 1.1, ABSOLUTE MAXIMUM RATINGS

Operating Temperature Range	-40 to +85 degrees C
Storage Temperature Range	-55 to +125 degrees C
Vcc Voltage, Vdc	+13.0
Vtune Voltage, Vdc	+14.0
DC Voltage applied to RF out	+/- 25

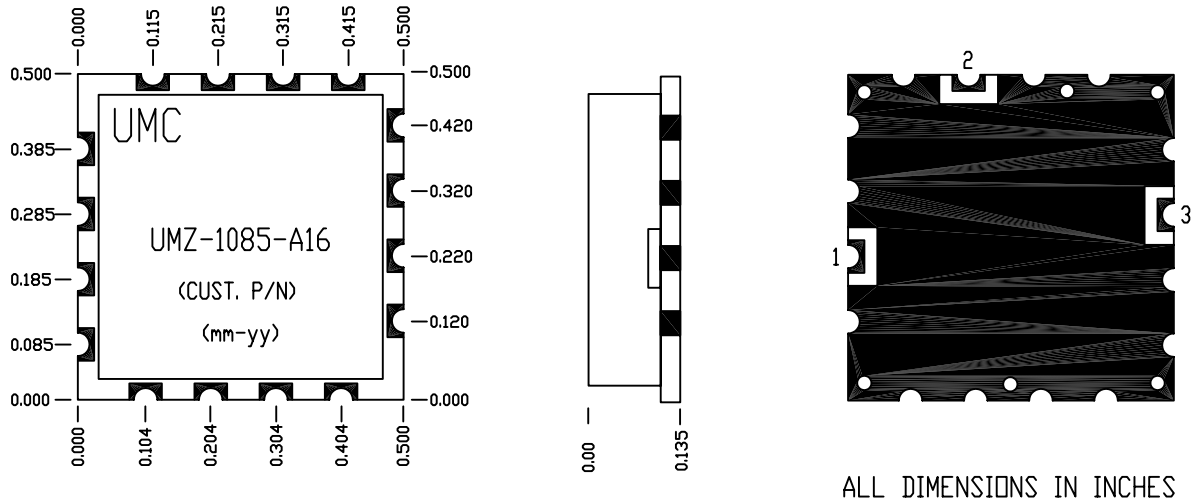

ALL DIMENSIONS IN INCHES

TABLE 1.2, CONTACT ASSIGNMENTS

CONTACT ASSIGNMENTS:	
1: RF OUT	
2: SUPPLY INPUT	
3: TUNING VOLTAGE INPUT	
ALL OTHER CONTACTS ARE GROUND	

Unless otherwise specified, dimensions are in inches

Universal Microwave Corporation
Proprietary Information

Prepared by: M.BANKS 4/10/04
Engineer:

Universal Microwave Corporation
2339 Destiny Way
Odessa, FL 33556

Universal Microwave Corp.

SPECIFICATION CONTROL
DRAWING FOR UMZ-1085-A16

SIZE
A

FSCM NO.

DWG NO.

UP-1085

REV
A

SCALE: N/A

SHEET 1 OF 2

	MIN.	TYP.	MAX.
Frequency, MHz	430	--	700
Power Output, dBm	+8.0	+10.0	+12.0
Harmonics, dBc	--	-13	-7
SSB Phase Noise, dBc/Hz	--	--	--
@ Offset = 1kHz	--	-83	-77
@ Offset = 10kHz	--	-105	-100
@ Offset = 100kHz	--	-125	-120
@ Offset = 1MHz	--	-145	-140
@ Offset = 10MHz	--	-164	-155
Pushing, MHz/V	--	0.5	1.5
Pulling, MHz p-p, @12dBr, all phases	--	5	20
Tuning Voltage, Vdc	+2.0		+13.0
Tuning Sensitivity, MHz/V	--	45	--
Frequency drift with temperature			
@ -40 degrees C, MHz	--	5	--
@ +85 degrees C, MHz	--	5	--
Supply Voltage, Vdc	--	+12.0	--
Supply Current, mA _{dc}	--	25	--
Output Power @ V _{tune} = 0 and 13V	+8.0	--	--
Tuning Port Capacitance, pF	--	330	--
3dB Modulation Bandwidth, kHz	--	1000	--

TABLE 1.0, ELECTRICAL SPECIFICATIONS

Unless otherwise specified, dimensions are in inches Universal Microwave Corporation Proprietary Document	Universal Microwave Corp. SPECIFICATION CONTROL DRAWING FOR UMZ-1085-A16			
	Prepared by: M.BANKS 4/10/04	SIZE A	FSCM NO.	DWG NO. UP-1085
Universal Microwave Corporation 2339 Destiny Way Odessa, FL 33556	SCALE: N/A		SHEET 2 OF 2	