




CONFIDENTIAL

TABLE 1.1, ABSOLUTE MAXIMUM RATINGS

Operating Temperature Range	-40 to +85 degrees C
Storage Temperature Range	-55 to +125 degrees C
Vcc Voltage, Vdc	+13.0
Vtune Voltage, Vdc	+17.0
DC Voltage applied to RF out	+/- 25

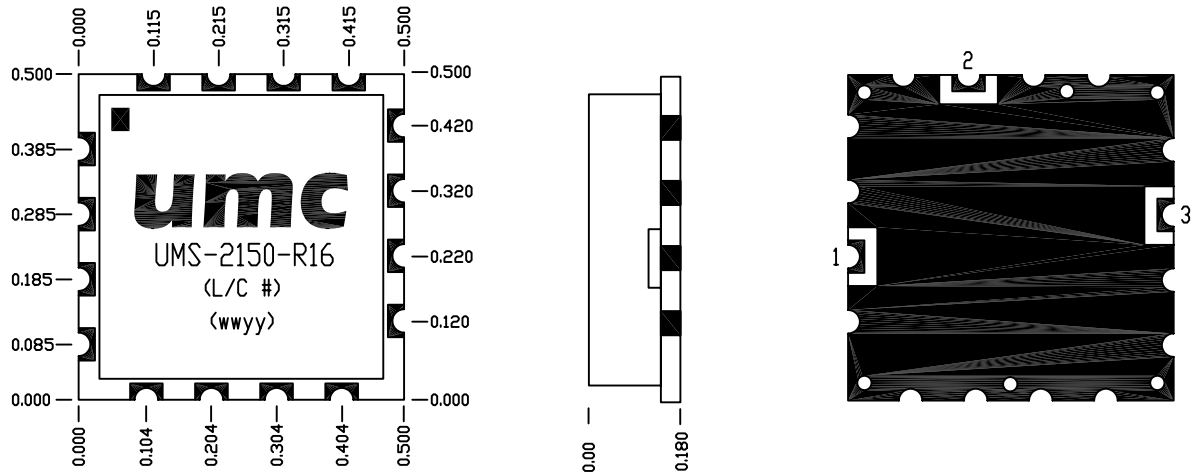

ALL DIMENSIONS IN INCHES

TABLE 1.2, CONTACT ASSIGNMENTS

CONTACT ASSIGNMENTS:	
1: RF OUT	
2: SUPPLY INPUT	
3: TUNING VOLTAGE INPUT	
ALL OTHER CONTACTS ARE GROUND	

Unless otherwise specified, dimensions are in inches  
 TOLERANCES  
 .X =+/- .1  
 .XX =+/- .01  
 .XXX =+/- .005  
 ANG =+/- 2°  
 Universal Microwave Corporation  
 Proprietary Information  
 Prepared by: A.BYRD 11/3/05  
 Engineer:  
 Universal Microwave Corporation  
 2339 Destiny Way  
 Odessa, FL 33556

Universal Microwave Corp.

SPECIFICATION CONTROL  
 DRAWING FOR UMS-2150-R16

SIZE A	FSCM NO.	DWG NO. UP-2150	REV A
SCALE N/A		SHEET 1 OF 2	

	MIN.	TYP.	MAX.
Frequency, MHz	950		2150
Power Output, dBm	+8.5	+11.0	+13.5
Harmonics, dBc		-20	-10
SSB Phase Noise, dBc/Hz:			
@ Offset = 1kHz		-75	-70
@ Offset = 10kHz		-102	-97
@ Offset = 100kHz		-122	-115
@ Offset = 1MHz		-142	-135
Pushing, MHz/V		1.0	1.5
Pulling, MHz p-p, @12dB, all phases		15	20
Tuning Voltage, Vdc	+0.5		+16.0
Tuning Sensitivity, MHz/V		85	
Frequency drift with temperature:			
@ -40°C, MHz		13	
@ +85°C, MHz		13	
Supply Voltage, Vdc		+12.0	
Supply Current, mA		28	
Output Power @ $V_t = 0$	+8.5		
Tuning Port Capacitance, pF		47	
3dB Modulation Bandwidth, kHz		1000	

TABLE 1.3 ELECTRICAL SPECIFICATIONS

<b>SPECIFICATION CONTROL DRAWING</b>			
Drawing No. UMS-2150-R16			
Size	A	REV	A
Engineer: PJE 11/3/05		SHEET 2 OF 2	