



CONFIDENTIAL

TABLE 1.1, ABSOLUTE MAXIMUM RATINGS

Operating Temperature Range	-40 to +85 degrees C
Storage Temperature Range	-55 to +125 degrees C
Vcc Voltage, Vdc	+5.5
Vtune Voltage, Vdc	+5.0
DC Voltage applied to RF out	+/- 25

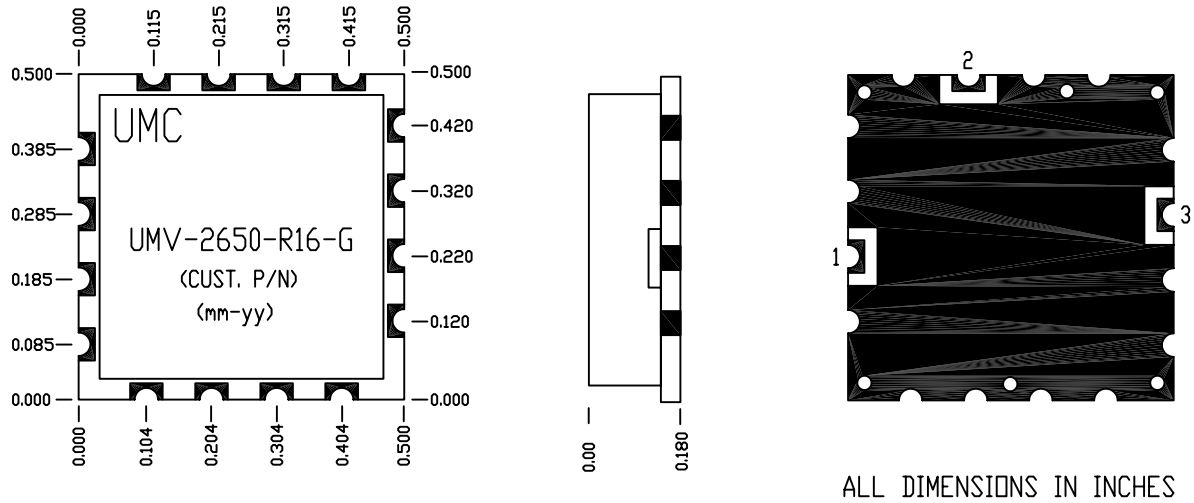


TABLE 1.2, CONTACT ASSIGNMENTS

CONTACT ASSIGNMENTS:	
1: RF OUT	
2: SUPPLY INPUT	
3: TUNING VOLTAGE INPUT	
ALL OTHER CONTACTS ARE GROUND	

Unless otherwise specified,
dimensions are in inches

Universal Microwave Corporation
Proprietary Information

Prepared by: M.BANKS 8/17/05

Engineer:

Universal Microwave Corporation
2339 Destiny Way
Odessa, FL 33556

Universal Microwave Corp.

SPECIFICATION CONTROL
DRAWING FOR UMV-2650-R16-G

SIZE
A

FSCM NO.

DWG NO.

UP-775

REV
A

SCALE N/A

SHEET 1 OF 2

	MIN.	TYP.	MAX.
Frequency, MHz	2600		2700
Power Output, dBm	-2.5	0	+2.5
Harmonics, dBc		-20	-10
SSB Phase Noise, dBc/Hz:			
@ Offset = 1kHz		-79	-74
@ Offset = 10kHz		-104	-99
@ Offset = 100kHz		-124	-119
@ Offset = 1MHz		-144	-139
@ Offset = 10MHz		-164	-159
Pushing, MHz/V		1	2
Pulling, MHz p-p, @12dB _r , all phases		1	2
Tuning Voltage, Vdc	+0.5		+4.5
Tuning Sensitivity, MHz/V		36	
Frequency drift with temperature:			
@ -40°C, MHz		5.0	
@ +85°C, MHz		5.0	
Supply Voltage, Vdc		+5.0	
Supply Current, mA		25	
Output Power @ $V_t = 0$	-2.5		
Tuning Port Capacitance, pF		47	
3dB Modulation Bandwidth, kHz		1000	

TABLE 1.3 ELECTRICAL SPECIFICATIONS

SPECIFICATION CONTROL DRAWING			
Drawing No. UMV-2650-R16-G			
Size	A	REV	A
Engineer:	PJE	8/17/05	SHEET 2 OF 2