


Operating Temperature Range	-40 to +85 degrees C
Storage Temperature Range	-55 to +100 degrees C
Vcc Voltage, Vdc	+5.5
Vtune Voltage, Vdc	+5.5
DC Voltage applied to RF out	+/- 25

TABLE 1.1, ABSOLUTE MAXIMUM RATINGS

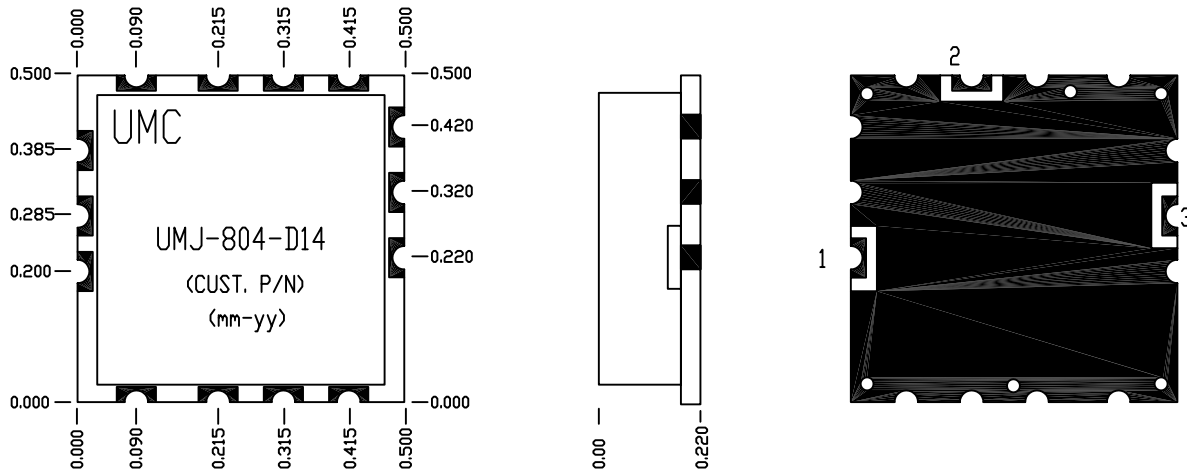

ALL DIMENSIONS IN INCHES

CONTACT ASSIGNMENTS	
1. RF OUT	
2. SUPPLY VOLTAGE	
3. TUNING VOLTAGE INPUT	
ALL OTHER CONTACTS ARE GROUND	

TABLE 1.2, CONTACT ASSIGNMENTS

Unless otherwise specified, dimensions are in inches	Universal Microwave Corp.			
	SPECIFICATION CONTROL DRAWING FOR UMJ-804-D14			
Universal Microwave Corporation Proprietary Document	SIZE A	FSCM NO.	DWG NO. UP-804	REV A
Prepared by: M.BANKS 11/22/03	SCALE: N/A		SHEET 1 OF 2	
Engineer:				
Universal Microwave Corporation 2339 Destiny Way Odessa, FL 33556				

CONFIDENTIAL

	MIN.	TYP.	MAX.
Frequency, MHz	--	200	--
Power Output, dBm	+7.0	+9.0	+11.0
Harmonics, dBc	--	-20	-15
SSB Phase Noise, dBc/Hz			
@ Offset = 1kHz	--	-110	-105
@ Offset = 10kHz	--	-135	-130
@ Offset = 100kHz	--	-155	-150
@ Offset = 1MHz	--	-160	-155
@ Offset = 10MHz	--	-160	-155
Pushing, MHz/V	--	0.1	0.2
Pulling, MHz p-p, @12dB _r , all phases	--	0.5	1
Tuning Voltage, Vdc	0	--	+5.0
Tuning Sensitivity, MHz/V	--	0.8	--
Frequency drift with temperature			
@ -40 degrees C, MHz	--	0.3	1
@ +85 degrees C, MHz	--	0.4	1
Supply Voltage, Vdc	--	+5.0	--
Supply Current, mA _{dc}	--	18	--
Output Power @ V _{tune} = 0 and 12V	+6.0	--	--
Tuning Port Capacitance, pF	--	330	--
3dB Modulation Bandwidth, kHz	--	1000	--

TABLE 1.0, ELECTRICAL SPECIFICATIONS

Unless otherwise specified, dimensions are in inches	Universal Microwave Corp.		
	SPECIFICATION CONTROL DRAWING FOR UMJ-804-D14		
Universal Microwave Corporation Proprietary Document	SIZE A	FSCM NO.	DWG NO. UP-804
Prepared by: M.BANKS 11/22/03			REV A
Universal Microwave Corporation 2339 Destiny Way Odessa, FL 33556	SCALE: N/A		SHEET 2 OF 2