


TABLE 1.1, ABSOLUTE MAXIMUM RATINGS

Operating Temperature Range	-40 to +85 degrees C
Storage Temperature Range	-55 to +100 degrees C
Vcc Voltage, Vdc	+5.5
Vtune Voltage, Vdc	+4.5
DC Voltage applied to RF out	+/- 25

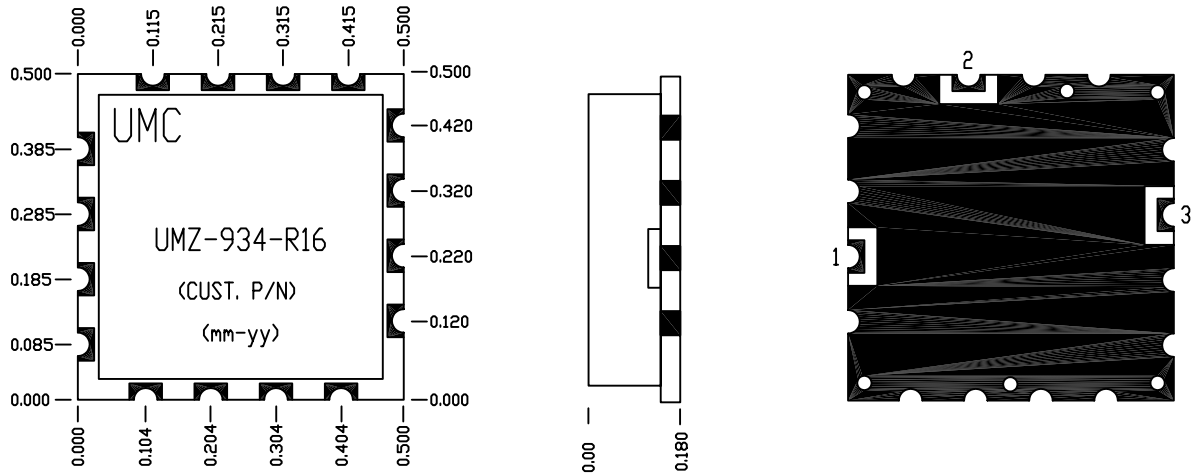

ALL DIMENSIONS IN INCHES

TABLE 1.2, CONTACT ASSIGNMENTS

CONTACT ASSIGNMENTS:	
1: RF OUT	
2: SUPPLY INPUT	
3: TUNING VOLTAGE INPUT	
ALL OTHER CONTACTS ARE GROUND	

Unless otherwise specified, dimensions are in inches

Universal Microwave Corporation
Proprietary Document

Prepared by: M.BANKS 08/18/03

Universal Microwave Corporation
2339 Destiny Way
Odessa, FL 33556

Universal Microwave Corp.

SPECIFICATION CONTROL
DRAWING FOR UMZ-934-R16

SIZE
A

FSCM NO.

DWG NO.

UP-934

REV
A

SCALE: N/A

SHEET 1 OF 2

	MIN.	TYP.	MAX.
Frequency, MHz	845	--	875
Power Output, dBm	0	+3.5	+5.0
Harmonics, dBc	--	-15	-10
SSB Phase Noise, dBc/Hz	--	--	--
@ Offset = 1kHz	--	-90	-85
@ Offset = 10kHz	--	-113	-108
@ Offset = 100kHz	--	-133	-128
@ Offset = 1MHz	--	-153	-148
@ Offset = 10MHz	--	-164	-159
Pushing, MHz/V	--	0.1	0.4
Pulling, MHz p-p, @12dB _r , all phases	--	1.0	2.0
Tuning Voltage, Vdc	1.0		4.0
Tuning Sensitivity, MHz/V	--	14	--
Frequency drift with temperature			
@ -40 degrees C, MHz	--	2	4
@ +85 degrees C, MHz	--	2	4
Supply Voltage, Vdc	--	5.0	--
Supply Current, mA _{dc}	--	15	29
Output Power @ V _{tune} = 0 and 4.0V	0	--	--
Tuning Port Capacitance, pF	--	47	--
3dB Modulation Bandwidth, kHz	--	5000	--

TABLE 1.0, ELECTRICAL SPECIFICATIONS

Unless otherwise specified, dimensions are in inches Universal Microwave Corporation Proprietary Document	Universal Microwave Corp. SPECIFICATION CONTROL DRAWING FOR UMZ-934-R16			
	Prepared by: M.BANKS 06/10/03	SIZE A	FSCM NO.	DWG NO. UP-934
Universal Microwave Corporation 2339 Destiny Way Odessa, FL 33556	SCALE: N/A		SHEET 2 OF 2	