


CONFIDENTIAL

TABLE 1.1, ABSOLUTE MAXIMUM RATINGS

Operating Temperature Range	-40 to +85 degrees C
Storage Temperature Range	-55 to +125 degrees C
Vcc Voltage, Vdc	+5.5
Vtune Voltage, Vdc	+5.0
DC Voltage applied to RF out	+/- 25

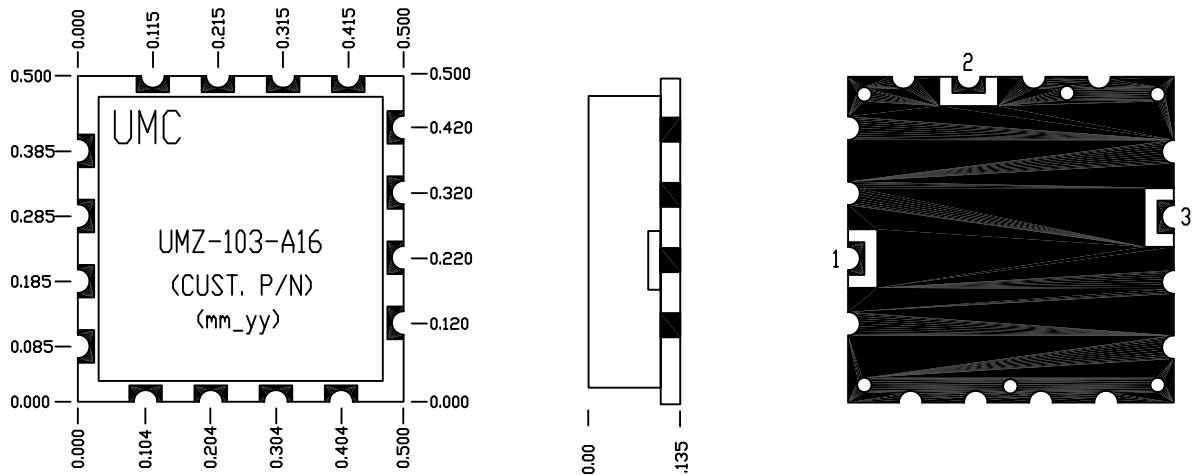

ALL DIMENSIONS IN INCHES

TABLE 1.2, CONTACT ASSIGNMENTS

CONTACT ASSIGNMENTS:	
1: RF OUT	
2: SUPPLY INPUT	
3: TUNING VOLTAGE INPUT	
ALL OTHER CONTACTS ARE GROUND	

Unless otherwise specified, dimensions are in inches

Universal Microwave Corporation
Proprietary Document

Prepared by: MBANKS 11/17/04
Engineer:

Universal Microwave Corporation
2339 Destiny Way
Odessa, FL 33556

Universal Microwave Corp.

SPECIFICATION CONTROL
DRAWING FOR UMZ-103-A16

SIZE
A

FSCM NO.

DWG NO.

UP-103

REV
A

SCALE: N/A

SHEET 1 OF 2

	MIN.	TYP.	MAX.
Frequency, MHz	759		787
Power Output, dBm	-2.0	0	+2.0
Harmonics, dBc		-13	-10
SSB Phase Noise, dBc/Hz:			
@ Offset = 1kHz		-93	-88
@ Offset = 10kHz		-118	-113
@ Offset = 100kHz		-138	-133
@ Offset = 1MHz		-158	-133
@ Offset = 10MHz		-164	-155
Pushing, MHz/V		0.1	0.3
Pulling, MHz p-p, @12dB _r , all phases		1	3
Tuning Voltage, Vdc	+0.5		+4.5
Tuning Sensitivity, MHz/V		10	
Frequency drift with temperature:			
@ -40°C, MHz		1	3
@ +85°C, MHz		1	3
Supply Voltage, Vdc		+5.0	
Supply Current, mA		21	
Output Power @ $V_t = 0$ and 5V	-3.0		
Tuning Port Capacitance, pF		47	
3dB Modulation Bandwidth, kHz		1000	

TABLE 1.3 ELECTRICAL SPECIFICATIONS

SPECIFICATION CONTROL DRAWING			
Drawing No. UMZ-103-A16			
Size	A	REV	A
Engineer: PJE 11/17/04		SHEET 2 OF 2	