


CONFIDENTIAL

TABLE 1.1, ABSOLUTE MAXIMUM RATINGS

Operating Temperature Range	-40 to +85 degrees C
Storage Temperature Range	-55 to +100 degrees C
Vcc Voltage, Vdc	+5.5
Vtune Voltage, Vdc	+11.0
DC Voltage applied to RF out	+/- 25

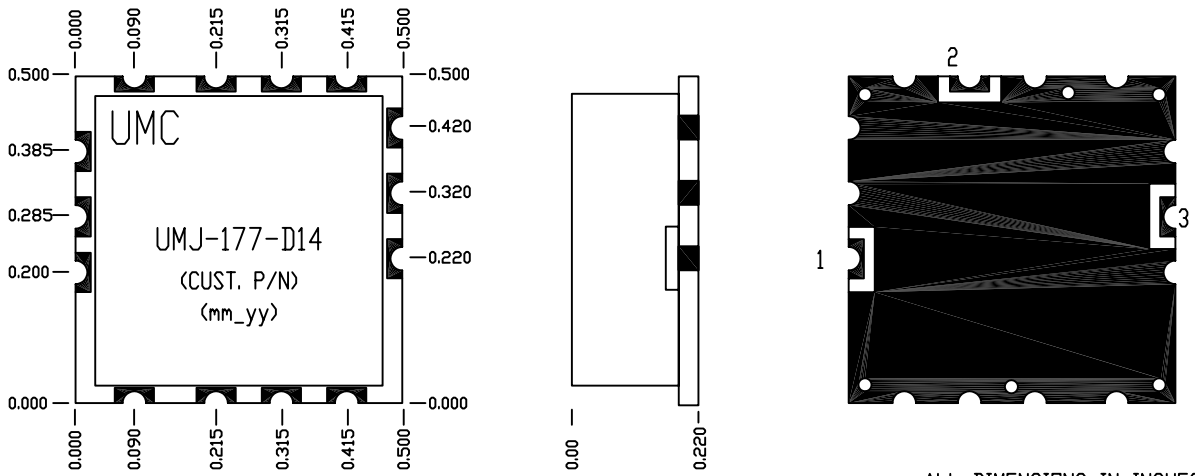

ALL DIMENSIONS IN INCHES

TABLE 1.2, CONTACT ASSIGNMENTS

CONTACT ASSIGNMENTS:	
1: RF OUTPUT	
2: SUPPLY INPUT	
3: CONTROL VOLTAGE INPUT	
ALL OTHER CONTACTS ARE GROUND	

Unless otherwise specified,
dimensions are in inches

Universal Microwave Corporation
Proprietary Document

Prepared by: M.BANKS 11/3/04

Engineer:

Universal Microwave Corporation
2339 Destiny Way
Odessa, FL 33556

Universal Microwave Corp.

SPECIFICATION CONTROL
DRAWING FOR UMJ-177-D14

SIZE
A

FSCM NO.

DWG NO.

UP-177

REV
A

SCALE: N/A

SHEET 1 OF 2

	MIN.	TYP.	MAX.
Frequency, MHz	54		64
Power Output, dBm	+8.0	+10.0	+12.0
Harmonics, dBc		-20	-15
SSB Phase Noise, dBc/Hz:			
@ Offset = 1kHz		-107	-102
@ Offset = 10kHz		-132	-127
@ Offset = 100kHz		-152	-147
@ Offset = 1MHz		-164	-155
Pushing, MHz/V		.05	.1
Pulling, MHz p-p, @12dB _r , all phases		.1	.3
Tuning Voltage, Vdc	+1.0		+10.0
Tuning Sensitivity, MHz/V		2.2	
Frequency drift with temperature:			
@ -40°C, MHz		.5	
@ +85°C, MHz		.5	
Supply Voltage, Vdc		+5.0	
Supply Current, mA		18	
Output Power @ $V_t = 0$	+8.0		
Tuning Port Capacitance, pF		330	
3dB Modulation Bandwidth, kHz		100	

TABLE 1.3 ELECTRICAL SPECIFICATIONS

SPECIFICATION CONTROL DRAWING			
Drawing No. UMJ-177-D14			
Size	A	REV	A
Engineer:	PJE 11-3-04	SHEET 2 OF 2	