




CONFIDENTIAL

TABLE 1.1, ABSOLUTE MAXIMUM RATINGS

Operating Temperature Range	-40 to +85 degrees C
Storage Temperature Range	-55 to +125 degrees C
Vcc Voltage, Vdc	+5.5
Vtune Voltage, Vdc	+5.0
DC Voltage applied to RF out	+/- 25

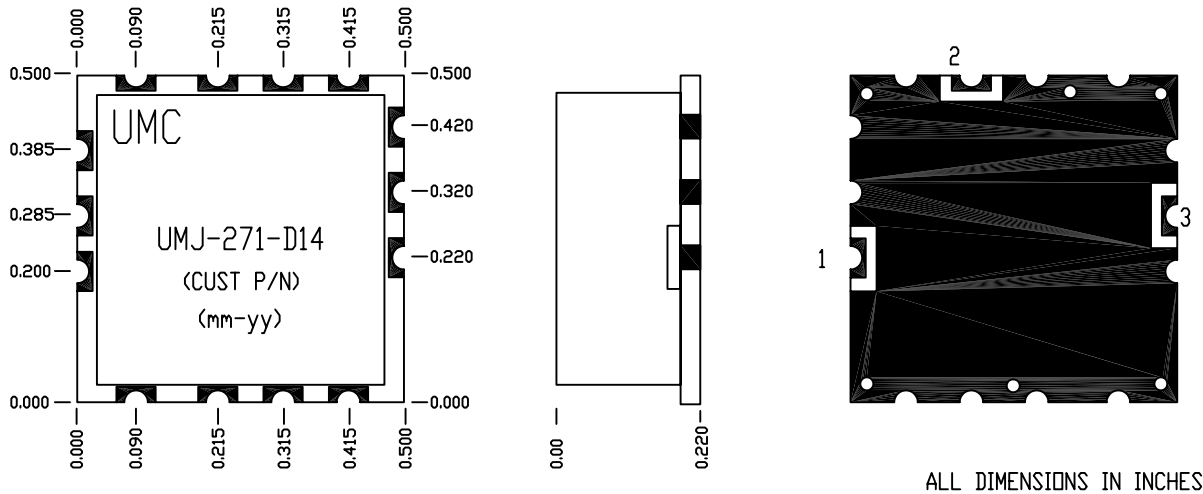

ALL DIMENSIONS IN INCHES

TABLE 1.2, CONTACT ASSIGNMENTS

CONTACT ASSIGNMENTS:	
1: RF OUT	
2: SUPPLY INPUT	
3: TUNING VOLTAGE INPUT	
ALL OTHER CONTACTS ARE GROUND	

Unless otherwise specified, dimensions are in inches

Universal Microwave Corporation
Proprietary Document

Prepared by: M.BANKS 5/2/05

Engineer:

Universal Microwave Corporation
2339 Destiny Way
Odessa, FL 33556

Universal Microwave Corp.

SPECIFICATION CONTROL
DRAWING FOR UMJ-271-D14

SIZE
A

FSCM NO.

DWG NO.

UP-271

REV
A

SCALE: N/A

SHEET 1 OF 2

	MIN.	TYP.	MAX.
Frequency, MHz		134.2	
Power Output, dBm	+7.0	+9.0	+11.0
Harmonics, dBc		-25	-20
SSB Phase Noise, dBc/Hz:			
@ Offset = 1kHz		-110	-105
@ Offset = 10kHz		-135	-130
@ Offset = 100kHz		-155	-150
@ Offset = 1MHz		-164	-155
@ Offset = 10MHz		-164	-155
Pushing, MHz/V		0.1	0.5
Pulling, MHz p-p, @12dB _r , all phases		0.5	2
Tuning Voltage, Vdc	+0.5		+4.5
Tuning Sensitivity, MHz/V		2	
Frequency drift with temperature:			
@ -40°C, MHz		1	
@ +85°C, MHz		1	
Supply Voltage, Vdc		+5.0	
Supply Current, mA		20	
Output Power @ $V_t = 0$ and 5V	+5.0		
Tuning Port Capacitance, pF		330	
3dB Modulation Bandwidth, kHz		100	

TABLE 1.3 ELECTRICAL SPECIFICATIONS

SPECIFICATION CONTROL DRAWING			
Drawing No. UMJ-271-D14			
Size	A	REV	A
Engineer: PJE 5/2/05		SHEET 2 OF 2	