




CONFIDENTIAL

TABLE 1.1, ABSOLUTE MAXIMUM RATINGS

Operating Temperature Range	-40 to +85 degrees C
Storage Temperature Range	-55 to +125 degrees C
Vcc Voltage, Vdc	+5.5
Vtune Voltage, Vdc	+5.0
DC Voltage applied to RF out	+/- 25

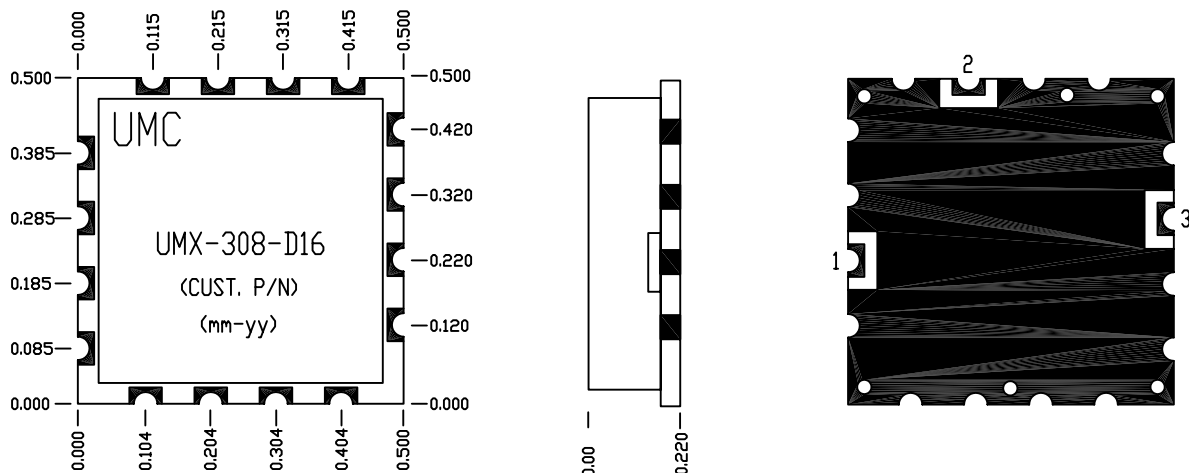

ALL DIMENSIONS IN INCHES

TABLE 1.2, CONTACT ASSIGNMENTS

CONTACT ASSIGNMENTS:	
1: RF OUT	
2: SUPPLY INPUT	
3: TUNING VOLTAGE INPUT	
ALL OTHER CONTACTS ARE GROUND	

Unless otherwise specified, dimensions are in inches

Universal Microwave Corporation
Proprietary Document

Prepared by: M.BANKS 11/8/04

Engineer:

Universal Microwave Corporation
2339 Destiny Way
Odessa, FL 33556

Universal Microwave Corp.

SPECIFICATION CONTROL
DRAWING FOR UMX-308-D16

SIZE
A

FSCM NO.

DWG NO.

UP-308

REV
A

SCALE: N/A

SHEET 1 OF 2

	MIN.	TYP.	MAX.
Frequency, MHz	1700		1800
Power Output, dBm	+5.0	+7.0	+9.0
Harmonics, dBc		-15	-10
SSB Phase Noise, dBc/Hz:			
@ Offset = 1kHz		-85	-80
@ Offset = 10kHz		-110	-105
@ Offset = 100kHz		-130	-125
@ Offset = 1MHz		-150	-145
@ Offset = 10MHz		-165	-160
Pushing, MHz/V		0.5	1
Pulling, MHz p-p, @12dB _r , all phases		0.8	2
Tuning Voltage, Vdc	+0.5		+4.5
Tuning Sensitivity, MHz/V		35	
Frequency drift with temperature:			
@ -40°C, MHz		3	4
@ +85°C, MHz		2.6	3.6
Supply Voltage, Vdc		+5.0	
Supply Current, mA		20	
Output Power @ $V_t = 0$ and 5V	+4.0		
Tuning Port Capacitance, pF		47	
3dB Modulation Bandwidth, kHz		1000	

TABLE 1.3 ELECTRICAL SPECIFICATIONS

SPECIFICATION CONTROL DRAWING			
Drawing No. UMX-308-D16			
Size	A	REV	A
Engineer: T. Kraus 11/8/04		SHEET 2 OF 2	