




CONFIDENTIAL

TABLE 1.1, ABSOLUTE MAXIMUM RATINGS

Operating Temperature Range	-40 to +85 degrees C
Storage Temperature Range	-55 to +125 degrees C
Vcc Voltage, Vdc	+9.0
Vtune Voltage, Vdc	+13.0
DC Voltage applied to RF out	+/- 25

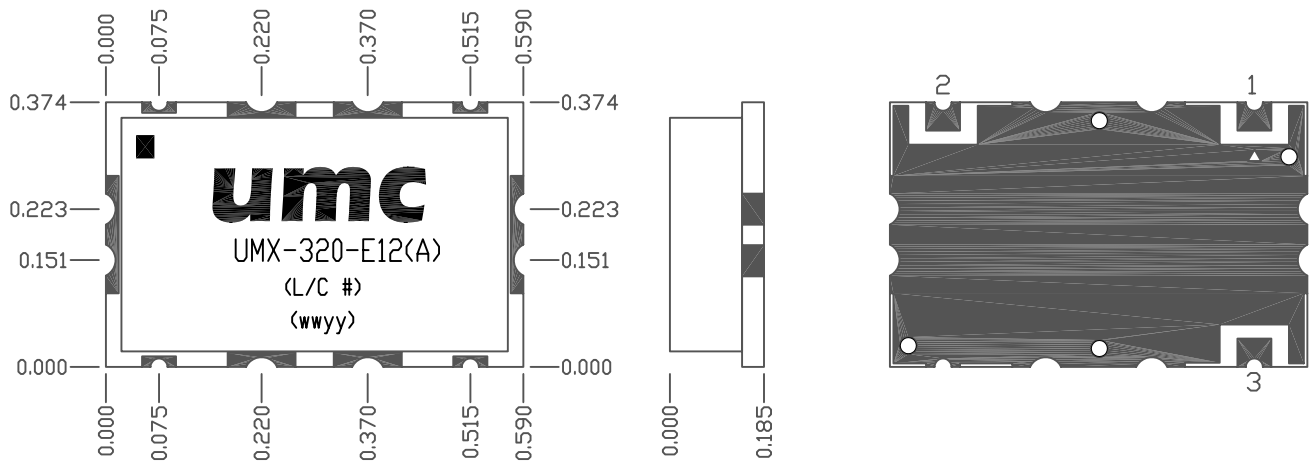

ALL DIMENSIONS IN INCHES

TABLE 1.2, CONTACT ASSIGNMENTS

CONTACT ASSIGNMENTS:	
1: SUPPLY INPUT	
2: TUNING VOLTAGE INPUT	
3: RF OUTPUT	
ALL OTHER CONTACTS ARE GROUND	

Unless otherwise specified, dimensions are in inches
 TOLERANCES
 .X = +/- .1
 .XX = +/- .01
 .XXX = +/- .005
 ANG = +/- 2°
 Universal Microwave Corporation
 Proprietary Information

Universal Microwave Corp.

SPECIFICATION CONTROL
 DRAWING FOR UMX-320-E12(A)

Prepared by: A.BYRD 9/8/05
 Engineer:
 Universal Microwave Corporation
 2339 Destiny Way
 Odessa, FL 33556

SIZE A	FSCM NO.	DWG NO. UP-320	REV A
SCALE N/A		SHEET 1 OF 2	

	MIN.	TYP.	MAX.
Frequency, MHz	1217		1307
Power Output, dBm	+3.0	+5.0	+7.0
Harmonics, dBc		-15	-10
SSB Phase Noise, dBc/Hz:			
@ Offset = 1kHz		-83	-78
@ Offset = 10kHz		-108	-103
@ Offset = 100kHz		-128	-123
@ Offset = 1MHz		-148	-143
@ Offset = 10MHz		-160	-155
Pushing, MHz/V		0.3	1
Pulling, MHz p-p, @12dB _r , all phases		1	2
Tuning Voltage, Vdc	+2.0		+12.0
Tuning Sensitivity, MHz/V	13	15	18
Frequency drift with temperature:			
@ -40°C, MHz		4	6
@ +85°C, MHz		3	5
Supply Voltage, Vdc		+8.0	
Supply Current, mA		19	
Output Power @ $V_t = 0$ and 12V	+3.0		
Tuning Port Capacitance, pF		47	
3dB Modulation Bandwidth, kHz		1000	

TABLE 1.3 ELECTRICAL SPECIFICATIONS

SPECIFICATION CONTROL DRAWING			
Drawing No.UMX-320-E12(A)			
Size	A	REV	A
Engineer: T. Kraus 9/8/05		SHEET 2 OF 2	