



CONFIDENTIAL

TABLE 1.1, ABSOLUTE MAXIMUM RATINGS

Operating Temperature Range	-40 to +85 degrees C
Storage Temperature Range	-55 to +125 degrees C
Vcc Voltage, Vdc	+9.0
Vtune Voltage, Vdc	+9.0
DC Voltage applied to RF out	+/- 25

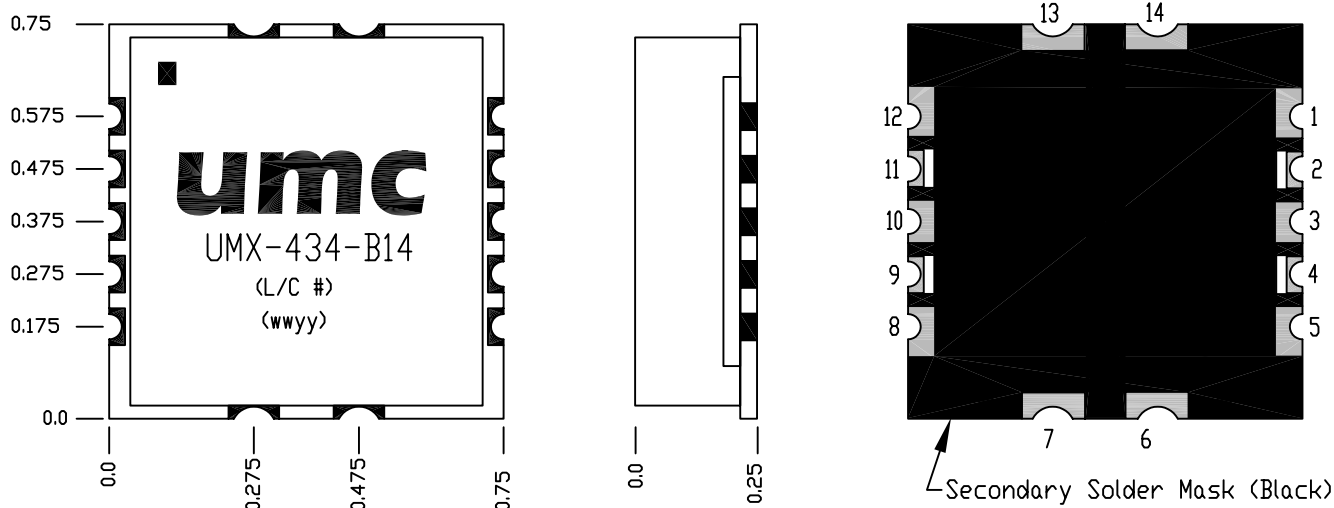


TABLE 1.2, CONTACT ASSIGNMENTS

CONTACT ASSIGNMENTS:	
2: TUNING VOLTAGE INPUT	
4: NO CONNECT	
9: RF OUTPUT	
11: DC SUPPLY INPUT	
ALL OTHER CONTACTS ARE GROUND	

Unless otherwise specified, dimensions are in inches  
 TOLERANCES  
 .X =+/- .1  
 .XX =+/- .01  
 .XXX =+/- .005  
 ANG =+/- 2°  
 Universal Microwave Corporation  
 Proprietary Document

Universal Microwave Corp.  
 SPECIFICATION CONTROL  
 DRAWING FOR UMX-434-B14

Prepared by: A.BYRD 11/17/05  
 Engineer:  
 Universal Microwave Corporation  
 2339 Destiny Way  
 Odessa, FL 33556

SIZE A	FSCM NO.	DWG NO. UP-434	REV A
SCALE: N/A		SHEET 1 OF 2	

	MIN.	TYP.	MAX.
Frequency, MHz		1100	
Power Output, dBm	+6.0	+8.0	+10.0
Harmonics, dBc		-20	-10
SSB Phase Noise, dBc/Hz:			
@ Offset = 1kHz		-105	-100
@ Offset = 10kHz		-130	-123
@ Offset = 100kHz		-150	-145
@ Offset = 1MHz		-165	-160
@ Offset = 10MHz		-165	-160
Pushing, MHz/V		0.1	0.5
Pulling, MHz p-p, @12dB <sub>r</sub> , all phases		0.5	1
Tuning Voltage, Vdc	+1.0		+8.0
Tuning Sensitivity, MHz/V		2	
Frequency drift with temperature:			
@ -40°C, MHz		0.25	0.5
@ +85°C, MHz		0.25	0.5
Supply Voltage, Vdc		+8.0	
Supply Current, mA		29	
Output Power @ $V_t = 0$ and 8V	+6.0		
Tuning Port Capacitance, pF		47	
3dB Modulation Bandwidth, kHz		1000	

TABLE 1.3 ELECTRICAL SPECIFICATIONS

<b>SPECIFICATION CONTROL DRAWING</b>			
Drawing No. UMX-434-B14			
Size	A	REV	A
Engineer: T. Kraus 3/3/03		SHEET 2 OF 2	