




CONFIDENTIAL

TABLE 1.1, ABSOLUTE MAXIMUM RATINGS

Operating Temperature Range	-40 to +85 degrees C
Storage Temperature Range	-55 to +125 degrees C
Vcc Voltage, Vdc	+5.5
Vtune Voltage, Vdc	+5.0
DC Voltage applied to RF out	+/- 25

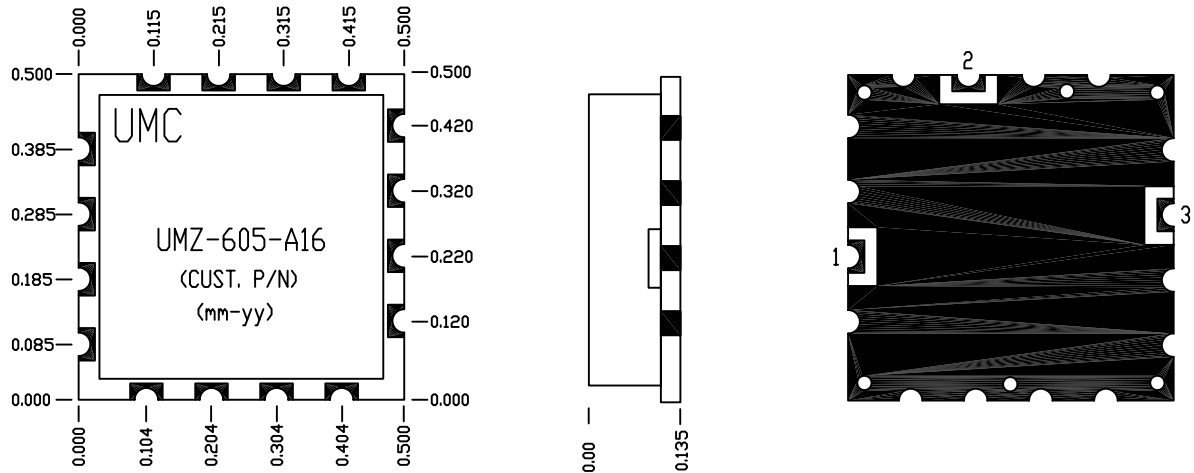

ALL DIMENSIONS IN INCHES

TABLE 1.2, CONTACT ASSIGNMENTS

CONTACT ASSIGNMENTS:	
1: RF OUT	
2: SUPPLY INPUT	
3: TUNING VOLTAGE INPUT	
ALL OTHER CONTACTS ARE GROUND	

Unless otherwise specified, dimensions are in inches

Universal Microwave Corporation
Proprietary Information

Prepared by: M.BANKS 3/18/05
Engineer:

Universal Microwave Corporation
2339 Destiny Way
Odessa, FL 33556

Universal Microwave Corp.

SPECIFICATION CONTROL
DRAWING FOR UMZ-605-A16

SIZE A	FSCM NO.	DWG NO. UP-605	REV A
-----------	----------	-------------------	----------

SCALE N/A	SHEET 1 OF 2
-----------	--------------

	MIN.	TYP.	MAX.
Frequency, MHz	869		894
Power Output, dBm	-2.5	0	+2.5
Harmonics, dBc		-16	-10
SSB Phase Noise, dBc/Hz:			
@ Offset = 1kHz		-89	-84
@ Offset = 10kHz		-114	-109
@ Offset = 100kHz		-134	-129
@ Offset = 1MHz		-154	-149
@ Offset = 10MHz		-164	-155
Pushing, MHz/V		0.5	1
Pulling, MHz p-p, @12dB _r , all phases		1	3
Tuning Voltage, Vdc	+0.5		+4.5
Tuning Sensitivity, MHz/V		14	
Frequency drift with temperature:			
@ -40°C, MHz		1.5	3
@ +85°C, MHz		1	2
Supply Voltage, Vdc		+5.0	
Supply Current, mA		25	
Output Power @ $V_t = 0$ and 5V	-3.0		
Tuning Port Capacitance, pF		47	
3dB Modulation Bandwidth, kHz		1000	

TABLE 1.3 ELECTRICAL SPECIFICATIONS

SPECIFICATION CONTROL DRAWING			
Drawing No. UMZ-605-A16			
Size	A	REV	A
Engineer: T. Kraus 3/18/05		SHEET 2 OF 2	