


Operating Temperature Range	-40 to +85 degrees C
Storage Temperature Range	-55 to +125 degrees C
Vcc Voltage, Vdc	+5.5
Vtune Voltage, Vdc	+5.0
DC Voltage applied to RF out	+/- 25

TABLE 1.1, ABSOLUTE MAXIMUM RATINGS

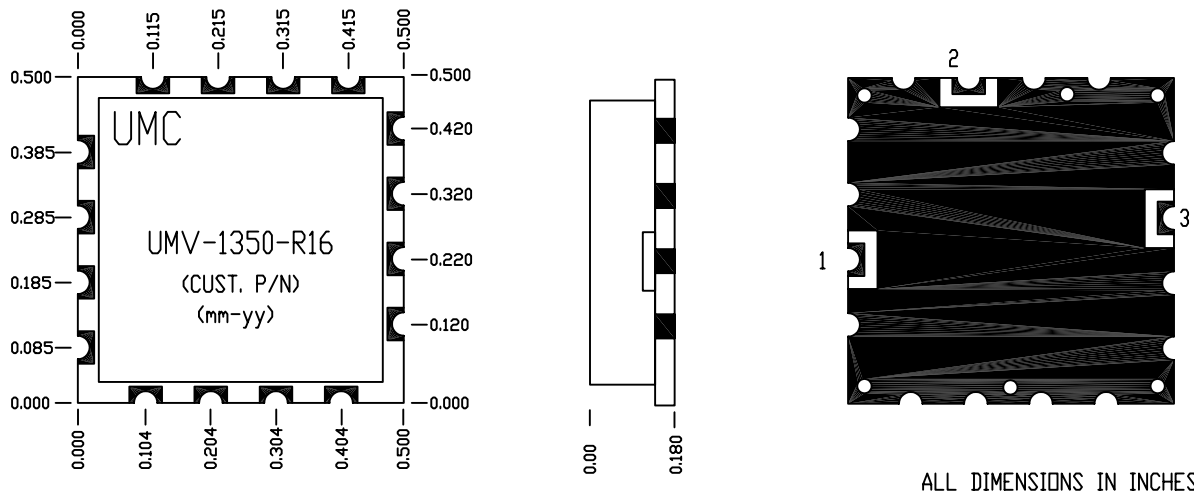

ALL DIMENSIONS IN INCHES

Contact Assignments:	
1: RF OUT	
2: SUPPLT INPUT	
3: TUNING VOLTAGE INPUT	
ALL OTHER CONTACTS ARE GROUND	

TABLE 1.2, CONTACT ASSIGNMENTS

Unless otherwise specified, dimensions are in inches	Universal Microwave Corp.			
	SPECIFICATION CONTROL DRAWING FOR UMV-1350-R16			
Universal Microwave Corporation Proprietary Document	SIZE A	FSCM NO.	DWG NO. UP-762	REV A
Prepared by: M.BANKS 06/06/03	SCALE: N/A		DATE: 06/06/03	SHEET 1 OF 2
Universal Microwave Corporation 2339 Destiny Way Odessa, FL 33556				

	MIN.	TYP.	MAX.
Frequency, MHz	1300	--	1400
Power Output, dBm	-2.5	0	+2.5
Harmonics, dBc	--	-15	-10
SSB Phase Noise, dBc/Hz			
@ Offset = 1kHz	--	-85	-80
@ Offset = 10kHz	--	-110	-105
@ Offset = 100kHz	--	-130	-125
@ Offset = 1MHz	--	-150	-145
@ Offset = 10MHz	--	-164	-155
Pushing, MHz/V	--	1.0	2.0
Pulling, MHz p-p, @12dBr, all phases	--	0.5	1.0
Tuning Voltage, Vdc	0.5		4.5
Tuning Sensitivity, MHz/V	--	36	--
Frequency drift with temperature			
@ -40 degrees C, MHz	--	4	8
@ +85 degrees C, MHz	--	4	8
Supply Voltage, Vdc	--	5	--
Supply Current, mA _{dc}	--	27	29
Output Power @ V _{tune} = 0 and 5V	-3.0	--	--
Tuning Port Capacitance, pF	--	47	--
3dB Modulation Bandwidth, kHz	--	1000	--

TABLE 1.0, ELECTRICAL SPECIFICATIONS

Unless otherwise specified, dimensions are in inches	Universal Microwave Corp.		
	SPECIFICATION CONTROL DRAWING FOR UMV-1350-R16		
Universal Microwave Corporation Proprietary Document	SIZE A	FSCM NO.	DWG NO. UP-762
Prepared by: M.BANKS DATE: 06/06/03			REV A
Universal Microwave Corporation 2339 Destiny Way Odessa, FL 33556	SCALE	DATE: 06/06/03	SHEET 2 OF 2