




CONFIDENTIAL

TABLE 1.1, ABSOLUTE MAXIMUM RATINGS

Operating Temperature Range	-40 to +85 degrees C
Storage Temperature Range	-55 to +125 degrees C
Vcc Voltage, Vdc	+7.0
Vtune Voltage, Vdc	+15.0
DC Voltage applied to RF out	+/- 25

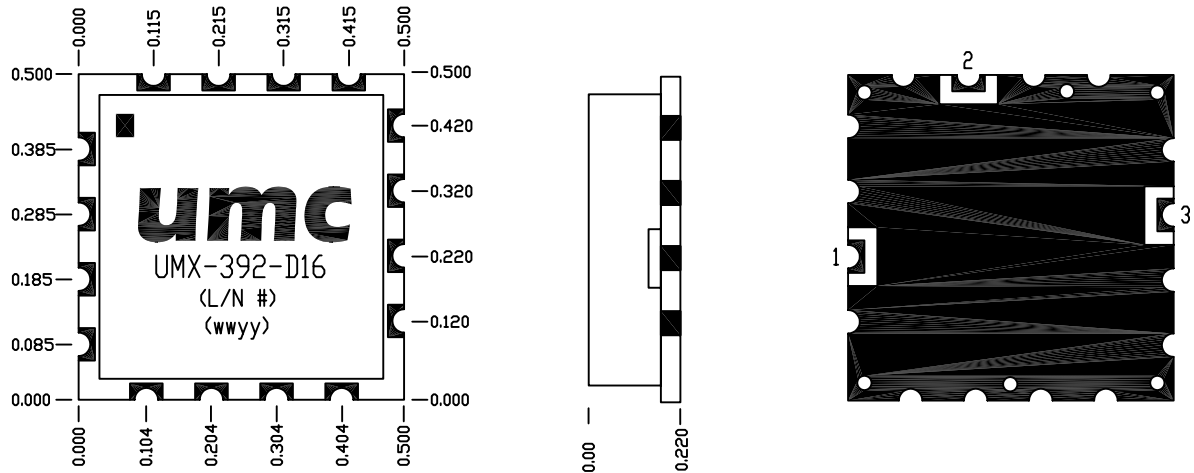

ALL DIMENSIONS IN INCHES

TABLE 1.2, CONTACT ASSIGNMENTS

CONTACT ASSIGNMENTS:	
1: RF OUT	
2: SUPPLY INPUT	
3: TUNING VOLTAGE INPUT	
ALL OTHER CONTACTS ARE GROUND	

Unless otherwise specified, dimensions are in inches

Universal Microwave Corporation
Proprietary Information

Prepared by: M.BANKS 8/9/05

Engineer:

Universal Microwave Corporation
2339 Destiny Way
Odessa, FL 33556

Universal Microwave Corp.

SPECIFICATION CONTROL
DRAWING FOR UMX-392-D16

SIZE
A

FSCM NO.

DWG NO.

UP-392

REV
A

SCALE N/A

SHEET 1 OF 2

	MIN.	TYP.	MAX.
Frequency, MHz	1900		2200
Power Output, dBm	+2.0	+5.0	+8.0
Harmonics, dBc		-15	-8
SSB Phase Noise, dBc/Hz:			
@ Offset = 1kHz		-80	-75
@ Offset = 10kHz		-106	-101
@ Offset = 100kHz		-126	-121
@ Offset = 1MHz		-146	-141
@ Offset = 1MHz		-164	-159
Pushing, MHz/V		0.5	1.5
Pulling, MHz p-p, @12dB _r , all phases		2	4
Tuning Voltage, Vdc	+1.0		+14.0
Tuning Sensitivity, MHz/V		40	
Frequency drift with temperature:			
@ -40°C, MHz		6	
@ +85°C, MHz		6	
Supply Voltage, Vdc		+6.0	
Supply Current, mA		28	
Output Power @ $V_t = 0$ and 14V	+2.0		
Tuning Port Capacitance, pF		47	
3dB Modulation Bandwidth, kHz		1000	

TABLE 1.3 ELECTRICAL SPECIFICATIONS

SPECIFICATION CONTROL DRAWING			
Drawing No. UMX-392-D16			
Size	A	REV	A
Engineer: T.KRAUS 6/30/03		SHEET 2 OF 2	