




CONFIDENTIAL

TABLE 1.1, ABSOLUTE MAXIMUM RATINGS

Operating Temperature Range	-40 to +85 degrees C
Storage Temperature Range	-55 to +125 degrees C
Vcc Voltage, Vdc	+13.0
Vtune Voltage, Vdc	+17.0
DC Voltage applied to RF out	+/- 25

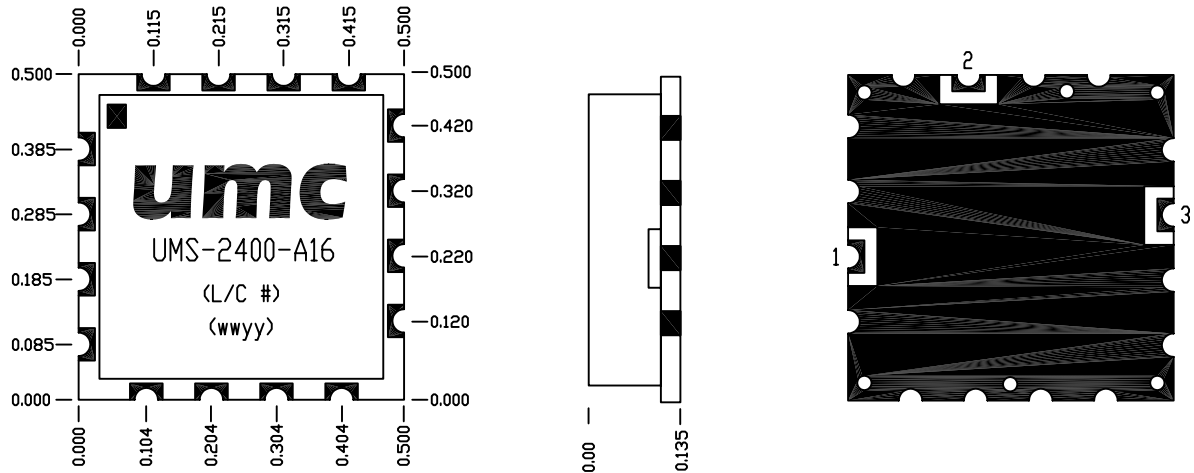

ALL DIMENSIONS IN INCHES

TABLE 1.2, CONTACT ASSIGNMENTS

CONTACT ASSIGNMENTS:	
1: RF OUT	
2: SUPPLY INPUT	
3: TUNING VOLTAGE INPUT	
ALL OTHER CONTACTS ARE GROUND	

Unless otherwise specified, dimensions are in inches
 TOLERANCES
 .X =+/- .1
 .XX =+/- .01
 .XXX =+/- .005
 ANG =+/- 2°
 Universal Microwave Corporation
 Proprietary Information
 Prepared by: A.BYRD 8/10/05
 Engineer:
 Universal Microwave Corporation
 2339 Destiny Way
 Odessa, FL 33556

Universal Microwave Corp.

SPECIFICATION CONTROL
 DRAWING FOR UMS-2400-A16

SIZE A	FSCM NO.	DWG NO. UP-2400	REV A
SCALE N/A		SHEET 1 OF 2	

	MIN.	TYP.	MAX.
Frequency, MHz	1400		2400
Power Output, dBm	+8.0	+10.0	+12.0
Harmonics, dBc		-20	-12
SSB Phase Noise, dBc/Hz:			
@ Offset = 1kHz		-70	-65
@ Offset = 10kHz		-95	-90
@ Offset = 100kHz		-115	-110
@ Offset = 1MHz		-135	-130
@ Offset = 10MHz		-155	-150
Pushing, MHz/V		1.0	2.5
Pulling, MHz p-p, @12dB _r , all phases		20.0	30.0
Tuning Voltage, Vdc	+1.0		+16.0
Tuning Sensitivity, MHz/V		85	
Frequency drift with temperature:			
@ -40°C, MHz		10	15
@ +85°C, MHz		10	15
Supply Voltage, Vdc		+12.0	
Supply Current, mA		31	
Output Power @ $V_t = 0$ and 16V	+6.0		
Tuning Port Capacitance, pF		47	
3dB Modulation Bandwidth, kHz		25000	

TABLE 1.3 ELECTRICAL SPECIFICATIONS

SPECIFICATION CONTROL DRAWING			
Drawing No. UMS-2400-A16			
Size	A		REV A
Engineer: PJE 8/10/05		SHEET 2 OF 2	