



CONFIDENTIAL

TABLE 1.1, ABSOLUTE MAXIMUM RATINGS

Operating Temperature Range	-40 to +85 degrees C
Storage Temperature Range	-55 to +125 degrees C
Vcc Voltage, Vdc	+9.0
Vtune Voltage, Vdc	+13.0
DC Voltage applied to RF out	+/- 25

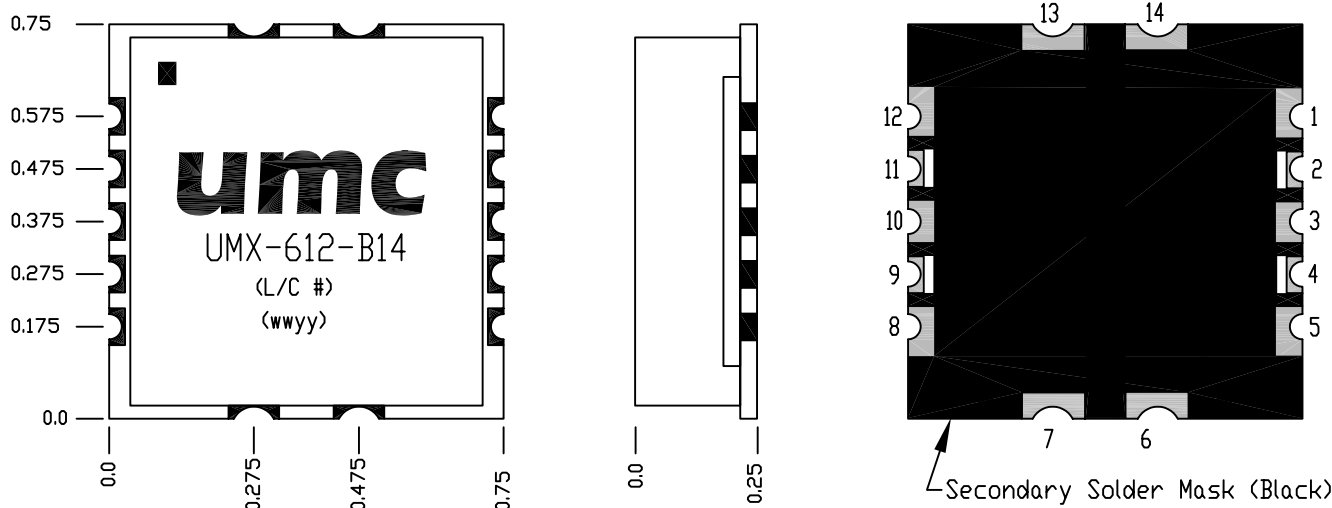


TABLE 1.2, CONTACT ASSIGNMENTS

CONTACT ASSIGNMENTS:	
2: TUNING VOLTAGE INPUT	
4: NO CONNECT	
9: RF OUTPUT	
11: DC SUPPLY INPUT	
ALL OTHER CONTACTS ARE GROUND	

Unless otherwise specified, dimensions are in inches
 TOLERANCES
 .X =+/- .1
 .XX =+/- .01
 .XXX =+/- .005
 ANG =+/- 2°
 Universal Microwave Corporation
 Proprietary Document

Universal Microwave Corp.
 SPECIFICATION CONTROL
 DRAWING FOR UMX-612-B14

Prepared by: A.BYRD 11/17/05
 Engineer:
 Universal Microwave Corporation
 2339 Destiny Way
 Odessa, FL 33556

SIZE A	FSCM NO.	DWG NO. UP-612	REV A
SCALE: N/A		SHEET 1 OF 2	

	MIN.	TYP.	MAX.
Frequency, MHz	700		720
Power Output, dBm	+5.0	+7.0	+9.0
Harmonics, dBc		-20	-10
SSB Phase Noise, dBc/Hz:			
@ Offset = 1kHz		-102	-97
@ Offset = 10kHz		-127	-123
@ Offset = 100kHz		-147	-143
@ Offset = 1MHz		-164	-159
@ Offset = 10MHz		-164	-159
Pushing, MHz/V		0.1	0.2
Pulling, MHz p-p, @12dB _r , all phases		0.5	1
Tuning Voltage, Vdc	+1.0		+12.0
Tuning Sensitivity, MHz/V		2.5	
Frequency drift with temperature:			
@ -40°C, MHz		0.5	1
@ +85°C, MHz		0.5	1
Supply Voltage, Vdc		+8.0	
Supply Current, mA		28	
Output Power @ $V_t = 0$ and 12V	+4.0		
Tuning Port Capacitance, pF		100	
3dB Modulation Bandwidth, kHz		500	

TABLE 1.3 ELECTRICAL SPECIFICATIONS

SPECIFICATION CONTROL DRAWING			
Drawing No. UMX-612-B14			
Size	A		REV A
Engineer: T.KRAUS 9/8/05		SHEET 2 OF 2	