




CONFIDENTIAL

TABLE 1.1, ABSOLUTE MAXIMUM RATINGS

Operating Temperature Range	-40 to +85 degrees C
Storage Temperature Range	-55 to +125 degrees C
Vcc Voltage, Vdc	+5.5
Vtune Voltage, Vdc	+5.0
DC Voltage applied to RF out	+/- 25

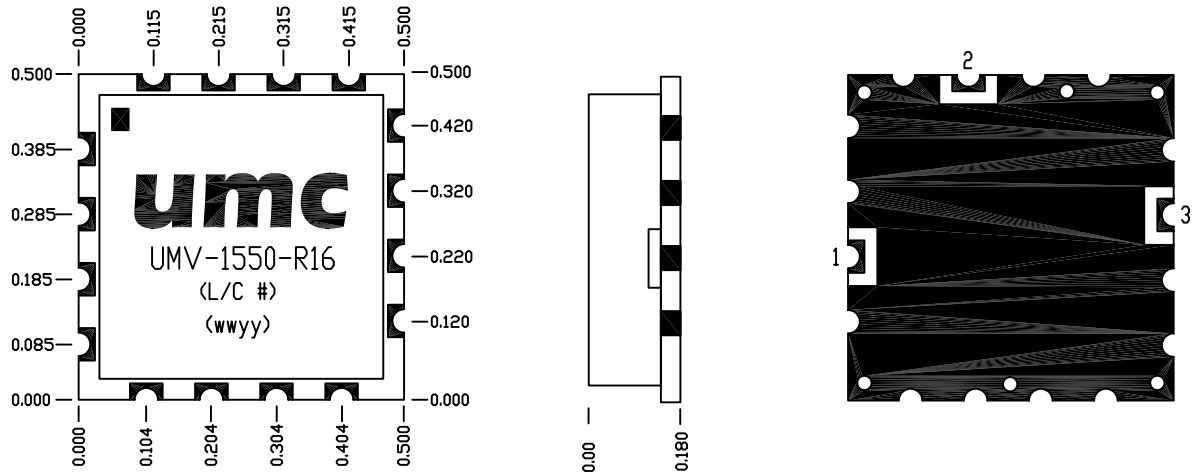

ALL DIMENSIONS IN INCHES

TABLE 1.2, CONTACT ASSIGNMENTS

CONTACT ASSIGNMENTS:	
1: RF OUT	
2: SUPPLY INPUT	
3: TUNING VOLTAGE INPUT	
ALL OTHER CONTACTS ARE GROUND	

Unless otherwise specified, dimensions are in inches
 TOLERANCES
 .X =+/- .1
 .XX =+/- .01
 .XXX =+/- .005
 ANG =+/- 2°
 Universal Microwave Corporation
 Proprietary Information
 Prepared by: M.BANKS 8/4/05
 Engineer:
 Universal Microwave Corporation
 2339 Destiny Way
 Odessa, FL 33556

Universal Microwave Corp.

SPECIFICATION CONTROL
 DRAWING FOR UMV-1550-R16

SIZE A	FSCM NO.	DWG NO. UP-764	REV A
SCALE N/A		SHEET 1 OF 2	

	MIN.	TYP.	MAX.
Frequency, MHz	1500		1600
Power Output, dBm	-2.5	0	+2.5
Harmonics, dBc		-20	-10
SSB Phase Noise, dBc/Hz:			
@ Offset = 1kHz		-84	-79
@ Offset = 10kHz		-109	-104
@ Offset = 100kHz		-129	-124
@ Offset = 1MHz		-149	-144
@ Offset = 10MHz		-164	-159
Pushing, MHz/V		0.5	1
Pulling, MHz p-p, @12dB _r , all phases		1	2
Tuning Voltage, Vdc	+0.5		+4.5
Tuning Sensitivity, MHz/V		36	
Frequency drift with temperature:			
@ -40°C, MHz		6	10
@ +85°C, MHz		6	10
Supply Voltage, Vdc		+5.0	
Supply Current, mA		25	
Output Power @ $V_t = 0$ and 5V	-3.0		
Tuning Port Capacitance, pF		47	
3dB Modulation Bandwidth, kHz		5000	

TABLE 1.3 ELECTRICAL SPECIFICATIONS

SPECIFICATION CONTROL DRAWING			
Drawing No. UMV-1550-R16			
Size	A	REV	A
Engineer: PJE 12/8/03		SHEET 2 OF 2	