




CONFIDENTIAL

TABLE 1.1, ABSOLUTE MAXIMUM RATINGS

Operating Temperature Range	-40 to +85 degrees C
Storage Temperature Range	-55 to +125 degrees C
Vcc Voltage, Vdc	+5.5
Vtune Voltage, Vdc	+5.0
DC Voltage applied to RF out	+/- 25

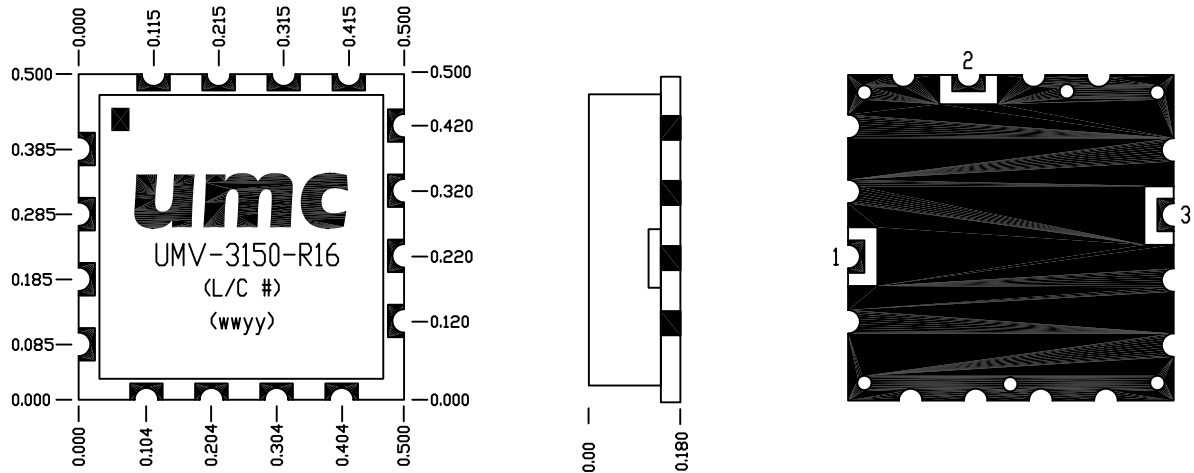

ALL DIMENSIONS IN INCHES

TABLE 1.2, CONTACT ASSIGNMENTS

CONTACT ASSIGNMENTS:	
1: RF OUT	
2: SUPPLY INPUT	
3: TUNING VOLTAGE INPUT	
ALL OTHER CONTACTS ARE GROUND	

Unless otherwise specified, dimensions are in inches
 TOLERANCES
 .X =+/- .1
 .XX =+/- .01
 .XXX =+/- .005
 ANG =+/- 2°
 Universal Microwave Corporation
 Proprietary Information
 Prepared by: M.BANKS 5/31/05
 Engineer:
 Universal Microwave Corporation
 2339 Destiny Way
 Odessa, FL 33556

Universal Microwave Corp.

SPECIFICATION CONTROL
 DRAWING FOR UMV-3150-R16

SIZE A	FSCM NO.	DWG NO. UP-780	REV A
SCALE N/A		SHEET 1 OF 2	

	MIN.	TYP.	MAX.
Frequency, MHz	3100		3200
Power Output, dBm	-2.5	0	+2.5
Harmonics, dBc		-15	-10
SSB Phase Noise, dBc/Hz:			
@ Offset = 1kHz		-75	-70
@ Offset = 10kHz		-102	-97
@ Offset = 100kHz		-122	-117
@ Offset = 1MHz		-142	-137
@ Offset = 10MHz		-162	-155
Pushing, MHz/V		1.5	3.0
Pulling, MHz p-p, @12dBr, all phases		1.0	2.0
Tuning Voltage, Vdc	+0.5		+4.5
Tuning Sensitivity, MHz/V		40	
Frequency drift with temperature:			
@ -40°C, MHz		9	
@ +85°C, MHz		9	
Supply Voltage, Vdc		5.0	
Supply Current, mA		28	
Output Power @ $V_t = 0$	-3.0		
Tuning Port Capacitance, pF		20	
3dB Modulation Bandwidth, kHz		1000	

TABLE 1.3 ELECTRICAL SPECIFICATIONS

SPECIFICATION CONTROL DRAWING			
Drawing No. UMV-3150-R16			
Size	A	REV	A
Engineer: T. Kraus 5/25/05		SHEET 2 OF 2	