


Operating Temperature Range	-40 to +85 degrees C
Storage Temperature Range	-55 to +100 degrees C
Vcc Voltage, Vdc	+5.5
Vtune Voltage, Vdc	+5.0
DC Voltage applied to RF out	+/- 25

TABLE 1.1, ABSOLUTE MAXIMUM RATINGS

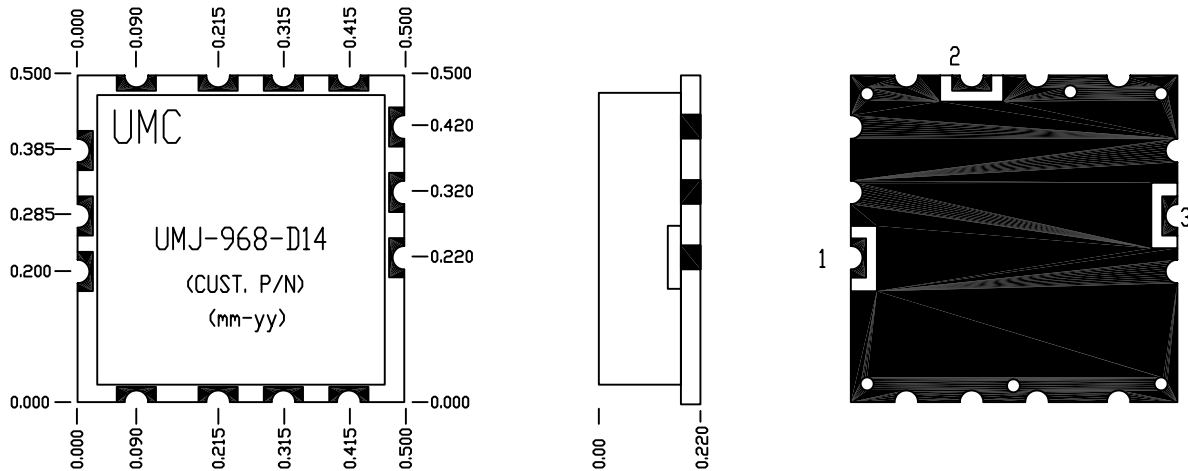

ALL DIMENSIONS IN INCHES

CONTACT ASSIGNMENTS	
1. RF OUT	
2. SUPPLY VOLTAGE	
3. TUNING VOLTAGE INPUT	
ALL OTHER CONTACTS ARE GROUND	

TABLE 1.2, CONTACT ASSIGNMENTS

Unless otherwise specified, dimensions are in inches  Universal Microwave Corporation Proprietary Document	Universal Microwave Corp. SPECIFICATION CONTROL DRAWING FOR UMJ-968-D14				
	Prepared by: M.BANKS 10/2/03 Engineer:	SIZE A	FSCM NO.	DWG NO. UP-968	REV A
Universal Microwave Corporation 2339 Destiny Way Odessa, FL 33556	SCALE: N/A		SHEET 1 OF 2		

CONFIDENTIAL

	MIN.	TYP.	MAX.
Frequency, MHz	240	--	250
Power Output, dBm	+7.0	+9.0	+11.0
Harmonics, dBc	--	-25	-20
SSB Phase Noise, dBc/Hz			
@ Offset = 1kHz	--	-101	-96
@ Offset = 10kHz	--	-126	-121
@ Offset = 100kHz	--	-146	-141
@ Offset = 1MHz	--	-164	-159
@ Offset = 10MHz	--	--	--
Pushing, MHz/V	--	0.2	0.5
Pulling, MHz p-p, @12dB <sub>r</sub> , all phases	--	0.5	0.8
Tuning Voltage, Vdc	0.5	--	4.5
Tuning Sensitivity, MHz/V	--	4.0	--
Frequency drift with temperature			
@ -40 degrees C, MHz	--	0.8	1.2
@ +85 degrees C, MHz	--	0.8	1.2
Supply Voltage, Vdc	--	5.0	--
Supply Current, mA <sub>dc</sub>	--	18	20
Output Power @ V <sub>tune</sub> = 0 and 4.5V	+7.0	--	--
Tuning Port Capacitance, pF	--	330	--
3dB Modulation Bandwidth, kHz	--	100	--

TABLE 1.0, ELECTRICAL SPECIFICATIONS

Unless otherwise specified, dimensions are in inches	Universal Microwave Corp.		
	SPECIFICATION CONTROL DRAWING FOR UMJ-968-D14		
Universal Microwave Corporation Proprietary Document	SIZE A	FSCM NO.	DWG NO. UP-968
Prepared by: M.BANKS 10/2/03			REV A
Universal Microwave Corporation 2339 Destiny Way Odessa, FL 33556	SCALE: N/A		SHEET 2 OF 2